



Fiber Optic Scope



- ▲ Great for viewing near meter Taps located in conduit
- ▲ Illuminated viewing scope
- ▲ Available up to 96" long
- ▲ Dielectrically tested at factory for use up to 500 Volts

Inspect and explore inaccessible areas with the Fiber Optic Scope. It's the ultimate diagnostic visual inspection tool to help you work SMARTER, not harder!

Introduction

Used for inspection of areas generally inaccessible to the naked eye. Illumination is provided by a high output halogen lamp which is controlled by a three position switch, giving "ON", "OFF", "ON" control. Lighting is powered by a lithium type battery.

Reduce countless hours of diagnostic and troubleshooting headaches with this revolutionary tool.

Specifications

Number of pixels:	6000
Field of view:	48 degrees
Min. focus distance:	>3/8 inch (>10 mm)
Environment:	-10° to 158° F (-23° to +70° C)
Scope shaft diameter:	¼ inch (7 mm)
Min. bend diameter:	8 inches (20 cm)
Battery:	Lithium 223 (supplied)
Light:	6V Halogen Lamp




Ordering Information:

HJA-318-6HS (72")

HJA-318-8HS (96")

MADE in the USA

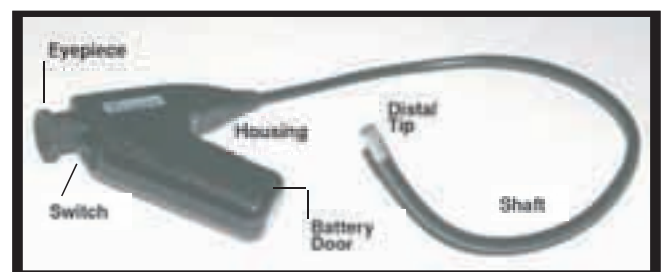

Fiber Optic Scope cont'd

Important Information and Safety Instructions:

Although the shaft is filled with thousands of glass fibers, it can be bent repeatedly to a diameter of 8" (20 cm) without damage.

- * **DO NOT** use flexible scope if damaged.
- * **DO NOT** point the distal tip toward the sun or other bright light sources while viewing. Permanent damage to eyes may occur.
- * **DO NOT** pull scope shaft from viewing area by holding only the scope viewing handle. **ALWAYS** pull **BOTH** scope shaft and scope viewing handle at the same time when extracting from viewing area.
- * **ALWAYS** be aware of your surrounding environment while using your inspection scope.
- * **NEVER** use in explosive environments
- * **NEVER** over-bend the shaft. Over-bending the scope's shaft will void the warranty.
- * **NEVER** open handle. There are no user serviceable parts inside the handle. Opening the handle will void the warranty.
- * **NEVER** submerge the handle in any liquid.
- * **DO NOT** submerge the shaft in any liquids for extended periods of time.
- * **ALWAYS** wipe down distal tip and shaft with a clean, dry cloth to remove fluids and residue from field use. If needed, clean the shaft with a cloth damped with a mild soap detergent. Gently clean the distal tip lens and eyepiece with a cotton bud dampened with a lens cleaner such as isopropyl alcohol.

NOTE: Your inspection scope **MUST** be completely dry before returning it to the storage case.

About the company

H.J. Arnett Industries L.L.C. is an Oregon company that manufactures and distributes products for the electric utilities, telecommunications and construction industries. For 30 years, we have worked closely with our customers to develop practical products geared to solving everyday problems for utilities and industry. The company's line of instruments has grown out of direct discussion with and response to linemen and engineers.

We welcome your inquiries and comments.



Other products:

White Knight or TDR 3: Illegal Tap Detectors

Flagship or CMR: Single and Three Phase Energy Check Kilowatt-hour meters

Super Beast, Mega Beast and Mini Beast: Secondary Service Conductor Testers

Pinpointer: Underground Fault Locators

D.C. Scout: Distribution Ground Fault Locator

Squirrely: Rodent and Bird Guard for Transformer Bushings

Safety and Warning Labels: Tamper Evident and ANSI Standard Warning Labels



20460 SW Avery Ct. Tualatin, OR 97062
Local 503.692.4600 Toll Free 800.684.9844 Fax 503.692.4661
email info@arnettindustries.com www.arnettindustries.com

